

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 688 578 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.11.1999 Bulletin 1999/45

(51) Int. Cl.⁶: **A61N 1/362**, A61N 1/39

(21) Application number: **94109833.7**

(22) Date of filing: **24.06.1994**

(54) Arrhythmia detector

Arrhythmiedetektor
Détecteur d'arythmie

(84) Designated Contracting States:
DE FR GB IT NL SE

(43) Date of publication of application:
27.12.1995 Bulletin 1995/52

(73) Proprietor: **Pacesetter AB**
171 95 Solna (SE)

(72) Inventors:
• **Mund, Konrad, Dr. rer. nat.**
D-91080 Uttenreuth (DE)
• **Stroetmann, Brigitte, Dr. rer. nat.**
D-91080 Uttenreuth (DE)
• **Kallert, Siegfried, Prof. Dr. med.**
D-91054 Erlangen (DE)

(74) Representative:
Lettström, Richard Wilhelm et al
Albihns Patentbyrå Stockholm AB,
Box 5581
114 85 Stockholm (SE)

(56) References cited:
EP-A- 0 469 817 **EP-A- 0 532 144**
EP-A- 0 565 909 **US-A- 5 203 326**
US-A- 5 243 980

• **MAX SCHALDACH 'Electrotherapy of the Heart'**
1992, SPRINGER VERLAG, HEIDELBERG *
page 209, line 1 - page 214, line 10; figures *
• **PACE, vol.15 PII, October 1992, HOUSTON**
TEXAS pages 1545 - 1556 TARVER ET AL.
'Clinical Experience with a Helical Bipolar
Stimulating Lead'

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 688 578 B1

Description

[0001] The invention relates to a detection device according to the preambula of patent claim 1.

[0002] In the control of a device for heart therapy, such as a pacemaker, it is known to use signals providing a measure of the body's work load, in addition to utilization of the parameters in the ECG signal generated by the heart itself. These signals can be obtained when one or more load-related physiological variables, such as pH, oxygen saturation in blood etc., is/are detected with sensors. In more advanced devices for heart therapy, in which the device is able to provide many kinds of treatment, depending on the condition of the heart, control of the device can also be exercised on the utilization of other signals indicative of whether such conditions are either present or in the process of becoming established. Signals of these kinds can be related to hemodynamic conditions, e.g. blood pressure in the right ventricle. A sudden drop in pressure, combined with a very fast heart rate, could be indicative of e.g. fibrillation in the heart.

[0003] In particular, control can be exercised through signals containing information related to the autonomic nervous system (ANS). In addition to being indicative of established heart conditions, these signals can also improve the possibility of detecting impending changes in the heart's condition so prophylactic treatment can be started, e.g. to prevent the development of tachyarrhythmias, fibrillation in particular.

[0004] The autonomic nervous system innervates the heart by means of two sub-systems, the sympathetic nervous system and the parasympathetic nervous system respectively. The sub-systems will henceforth usually be referred to simply as the "sympathetic nerve" and "vagus nerve", unless otherwise specified. Increased signal activity in the sympathetic nerve increases heart activity, and increased signal activity in the vagus nerve reduces heart activity. Both systems normally balance each other when the body is at rest.

[0005] From EP-A1-0 532 144 is previously known a system for ANS control of a device for heart therapy. The device can also comprise a nerve stimulator, in addition to a conventional device for electrical heart therapy. In order to achieve a control signal related to the ANS, activity is detected in the sympathetic nerve by measurement of the regional, effective rise in impedance in the right ventricle. After the measurement signal is processed, the rise in impedance can be used as the therapy device's control signal. Control could also be exercised through collaboration with one or more of the signals indicative of the body's work load, as noted above. In the device according to EP-A1-0 532 144, the sympathetic nerve's or the nerve signal's activity is indirectly sensed by measurement of this activity in the form of its effect on the heart via some appropriate parameter.

[0006] When the nerve signal's activity is measured

indirectly, the measurement becomes dependent on the ability of the measurement parameter to simulate the activity. If the patient suffers from some heart disease, which in particular may occur among patients in need of a heart therapy implant, this is not the case, and measurement in the heart will not then supply correct information on the nerve signal's activity.

[0007] In addition to indirect measurement of the sympathetic nerve's activity according to EP-A1-0 532 144, stimulation of the vagus nerve, more particularly its endocardiac ends, in impending tachyarrhythmia was also proposed (Max Schaldach "Electrotherapy of the Heart", 1992, Springer Verlag, Heidelberg, pp. 210-214).

[0008] Also in other electromedical therapy, e.g. the treatment of epilepsy, it is known to directly stimulate a nerve, more particularly the vagus nerve, by means of an implantable pulse generator. One such system comprising a helical electrode applied to the vagus nerve in the neck area is described in an article by Tarver et al.: "Clinical Experience with a Helical Bipolar Stimulating Lead", Pace, Vol. 15, October, Part II 1992, pp. 1545-1556. However, this system only describes stimulation of the nerve, and the pulse generator is controlled by means of an extracorporeally applied magnet.

[0009] The object of the present invention is to achieve an effective arrhythmia detector without the known detection art's disadvantages.

[0010] This object is achieved with the features set forth in the independent patent claim, and advantageous embodiments of the invention are defined in the dependent claims.

[0011] According to the invention, an arrhythmia is detected by a sensor body devised to be placeable in an extracardiac position - e.g. in the neck area - for at least one of the sympathetic and vagus nerves, and in direct contact with the nerve or via a blood vessel directly senses activity in the nerve. With an arrhythmia detector according to the invention, indirect sensing according to the prior art is avoided, as well as related potential detection errors. When direct sensing is through direct contact with one of the nerves via a blood vessel, a further advantage is that implantation of the sensor body in an extracardiac position can be performed through the blood vessel without local surgical trauma in the specific sensing position for the sensor body.

[0012] The invention will now be described in greater detail with reference to an embodiment as disclosed in the attached drawings, of the device, according to the invention, for heart therapy as applied in the above-described AICD defibrillator system: For illustrative - not restrictive - reasons, the device comprising the invention will henceforth be designated in this description as a "nerve-stimulating heart defibrillator" or a "nerve-heart defibrillator" whose task is to terminate fibrillation in the heart. It is to be understood that also other tachyarrhythmias, such as impending but as yet unestablished fibrillation treated with ATP or cardioversion according to

conventional technics, can be treated and that the designation "nerve-heart defibrillator" in this context is a term only employed for explanatory purposes. Even if the nerve-heart stimulator is explained and described in conjunction with a AICD-type defibrillator system, it is further understood that the nerve-heart stimulator can be employed independently without all the parts in the described defibrillator system.

FIG. 1 is a block diagram of a defibrillator system with the nerve-heart defibrillator according to the invention.

FIG. 2 is an example of a vagus nerve stimulator in the nerve-heart defibrillator.

FIG. 3 shows illustrative examples of patterns of vagus nerve stimulation pulses.

FIG. 4 shows an example of the constructive principles of a nerve electrode.

[0013] Referring to the block diagram in FIG. 1 there is shown an example of a defibrillation system using the nerve-heart defibrillator according to the invention, in which 1 designates a defibrillator implant in general. The implant 1 has an enclosure which could consist of e.g. a titanium capsule 3. The implant 1 comprises a detection block 5, a pacemaker block 7, which can emit stimulation pulses to the heart in both bradycardia and tachycardia, a block for nerve-heart defibrillation 9, a block for electrical defibrillation 11, a control unit 13, a diagnosis block 15 and a telemetry block 17, whereby the different blocks/units in the implant 1 communicate internally across a databus 19.

[0014] The implant 1 communicates with an external programmer 21 via the telemetry block 17, whereby communications primarily comprise the transmission of programming data to the implant 1 and transmission of diagnostic data, e.g. on different events in the heart, sensor signals and ECG signals, from the diagnostic block 15.

[0015] The implant 1 is connected to a heart 25 via a system 23 of electrode leads with attendant electrodes for emitting pacing as well as defibrillation pulses (including even pulses with somewhat less energy than the level required for defibrillation, e.g. cardioversion pulses) to the heart 25 and for picking up signals indicative of the heart's condition. It should be noted that FIG. 1 is only schematic, and the signals designating the heart's condition also encompass sensor signals from the sensing of heart-related physiological variables elsewhere in the body, e.g. hemodynamics (pressure/flow) in the vascular system. A blood pressure-sensing body could e.g. be arranged in the patient's neck area around a blood vessel (neck artery or vein), whereby the sensing body could consist of a ring-shaped (possibly suturable) holder device and a sens-

ing device on the inside of the holder device in the form of a pressure-sensitive airbag.

[0016] The implant 1 is also in connection with the sympathetic nerve 26 (a plus sign designates an activating effect on heart activity) and the vagus nerve 27 (a minus sign designates an inhibitory effect on heart activity) via the system 23 of electrodes and electrode leads in order to emit nerve-stimulating pulses to the vagus nerve 27 and blocking current to the sympathetic nerve 26 and for picking up heart-related nerve signals therefrom.

[0017] The defibrillator implant 1 accordingly includes in addition to the nerve-heart defibrillator block 9 which is to be described e.g. the functions found in a modern defibrillator (AICD) of the kind noted above. Thus, the heart's condition is monitored in block 5 in an IECG-monitoring device 51 and in a sensor signal-monitoring device 52 (for e.g. hemodynamics). Heart-related nerve signals are also monitored in the detection block 5 in a nerve signal-monitoring device or neurosensor 53. Such a sensor 53 could consist of a comparator with a threshold value serving as a condition for the presence of an arrhythmia. If sensed nervous activity meets the condition, the comparator issues an arrhythmia-indicating output signal. So normal sinus rhythm and abnormal conditions in the heart, the latter possibly being bradycardia, hemodynamically unstable tachycardia and ventricular fibrillation requiring treatment, as well as nerve (sympathetic) signal activity indicating that the above conditions are established or impending, are detected in the detection block 5.

[0018] Data from the detection block 5 are sent to the control unit 13 which, depending on the data, orders the requisite therapy, such as tachycardia-terminating heart stimulation, and also sends a command signal to at least one of the blocks 7, 9 and 11, i.e. in the exemplified tachycardia-stimulating stimulation of the pacemaker block 7.

[0019] In addition to the nerve-heart defibrillator block 9 and parts of the detection device 5 (the neurosensor 53 in particular), the hitherto described parts and functions are conventional in nature, as noted above. So they will henceforth only be considered to the extent they relate to the nerve-heart stimulator block 9, which will now be described, and the neurosensor 53, to be described subsequently, in the following review.

[0020] Block 9 consists of a current generator 91 for nerve stimulation and is capable of supplying nerve-activating pulsed current with a balanced average current level, e.g. with a frequency range of 20 to 50 Hz, a pulse amplitude of 0-9 V and a pulse width of 0.1-1 ms, from a nerve stimulator 910, in addition to nerve-blocking direct current/high-frequency current to be discussed subsequently. The block 9 further comprises a time control unit 92 which is capable of supplying control information to the current generator 91 on e.g. which activating and blocking pulses, pulse sequences and continuous output signals should be delivered via the

electrode system 23 from the block 9 to the sympathetic nerve 26 and vagus nerve 27 respectively, and also when the pulses are to be emitted. It should also be noted that the pulses supplied from block 9 may additionally comprise other suitable forms of pulses, such as dual biphasic pulses and alternately biphasic pulses separated by a pulse interval. The current generator's 91 and the time control unit's 92 parameters are, like other parameters in the implant 1, programmable via the telemetry unit 17. Therapy supplied from the block 9 can be supplied, repeatedly if need be, over a period of time, e.g. 5 to 10 seconds, suitable to the therapy. The time control unit 92 is shown, merely for illustrative purposes, as a separate unit in the block 9. It can naturally be an integrated part of the current generator 91.

[0021] FIG. 2 shows an example of the nerve stimulator 910, which emits pulsed current for activating nerve stimulation, in the current generator 91. A voltage source 911 with a variable voltage V is connectable, via a switch 912, to a capacitor 913 with capacitance C . The capacitor 913 is also connectable, via the switch 912, to a capacitor 915, also with capacitance C . The capacitor 915 is connectable, via a switch 914, to an electrode output terminal 917. The nerve stimulator 910 can assume two states, a first state when the two switches 912, 914, both of which controlled in parallel by the time control unit 92, assume the position marked a in FIG. 2 and a second state when the two switches 912, 914 assume the position marked b. In the second state, the capacitors 913, 915 are connected in series, whereupon the capacitor 913, which is charged to voltage V from the voltage source 911, is discharged via the capacitor 915 and the electrode output terminals 916, 917. In the first state, the capacitor 913 is connected to the voltage source 911 by the switch 912, whereupon the capacitor 913 is recharged to the voltage V . In the first state, the capacitor 915 is also discharged via the electrode output terminals 916, 917 and the patient. Control of events is exercised by the time control unit 92. The capacitance C for the capacitors 913, 915 could e.g. be 100 μF .

[0022] Examples of pulses emitted by the block 9 are provided in FIG. 3. FIG. 3 shows the output signal over time t between the electrode output terminals 916, 917 in FIG. 2. The pulse width t_1 could be 0.5 ms, and the pulse interval t_2 could be 50 ms (20 Hz) in moderate stimulation. In maximum stimulation, t_2 is reduced to about 20 ms (50 Hz). The amplitude of the output voltage V is not affected as long as V is above a threshold for stimulation of all fibers in the nerve. The threshold is electrode-related and amounts to about 5 volts for the electrode used here and described below.

[0023] An electrode (to be described below for the vagus nerve in conjunction with FIG. 4) in the system 23 and electrode cable for the respective nerve to be stimulated can, as far as the electrode cable is concerned, consist of one or more flexible electrical conductors made of e.g. MP35, each conductor being enclosed in

electrical insulation made of e.g. silicone rubber. Collective silicone rubber insulation on the conductors serves as the electrode cable's outer sheath. The electrode is devised for bipolar stimulation and has a first sub-electrode for the cathode and a second sub-electrode for the anode.

[0024] In constructive respects, the sub-electrodes can be devised as cuffs, rings, helices or the like with e.g. platinum, and other electrically conducting metals and/or polymers, as well as carbon fibres/meshes as electrode material in contact with the nerve and an electrically insulating and mechanically resilient sheath of silicone rubber around the electrode material, whereby the silicone rubber is pre-tensioned to some degree so the electrode, after implantation, retains mechanical and electrical contact with the nerve. The electrode can also be provided with suturing appliances and a device for mechanically relieving the load on the sub-electrodes, e.g. silicone rubber anchoring around the nerve with tensile relief for the sub-electrodes' conductors. The electrode could also be anchored, then with a constructively adapted design, in a blood vessel, preferably a venous vessel, immediately adjacent to the nerve.

[0025] A construction which is similar in all essential respects to the construction described for the stimulation electrodes can also be used for the sensor electrode employed for sensing heart-related activity in the sympathetic nerve. The vagus nerve could also be used, but the description relates to the sympathetic nerve as an example, whereby the nerve signals are sent to the nerve signal monitoring device 53 in the detection block 5. The sensor electrode for the sympathetic nerve 26 can also be the same as the stimulation electrode for the sympathetic nerve 26.

[0026] FIG. 4 shows an example of the construction principles for a cylindrical nerve electrode used here and applicable to a nerve. The FIG. shows the vagus nerve 27 and an electrode 24, consisting of a sub-electrode 241 arranged distal to the heart and a sub-electrode 242 arranged proximal to the heart 25, arranged thereon. The arrow in the FIG. 4 points towards the heart 25. The sub-electrodes 241 and 242 are for activating stimulation and connected via conductors in the system 23 (FIG. 1) to the plus output terminal 916 and the minus output terminal 917 respectively of the nerve stimulator 910. The result is that the main direction of nerve impulses is towards the heart 25.

[0027] As previously noted, the current generator 91 can also emit a current for blocking the sympathetic nerve 26, in addition to emitting the described pulses from the nerve stimulator 910 for activating the vagus nerve 27. One such blocking current can be achieved by additionally arranging in the current generator 91 a pole-reversed nerve stimulator 910, described in FIG. 2, so the sub-electrode 242 becomes positive and so the sub-electrode 24 negative. Here, the frequency of the emitted blocking pulses should range from 200 to 500 Hz so the action potential in the nerve never has time to

drop. Another way to achieve a nerve blockage is to provide the current generator 91 with a direct current generator for emitting a direct current which can be applied to the sympathetic nerve 26 as a direct current from the plus pole of the direct current generator for e.g. a few seconds. Also, instead of a direct current a square wave provided by a square wave generator can be employed.

[0028] Stimulation and any sensor electrodes for the sympathetic nerve and the vagus nerve are preferably implanted in the patient's neck area. For the vagus nerve 27, the preferred implantation site is in the neck area by or near the right middle portion of the external carotid artery. For the sympathetic nerve, the preferred implantation site, as regards stimulation, is the ganglion stellatum, whereby an electrode adapted to use with this thickened part of the nerve is employed.

[0029] The nerve-heart defibrillator described here and comprised in block 9 therefore achieves defibrillation of the heart 25 by delivering an activating current to the vagus nerve 27 and a blocking current to the sympathetic nerve 26 from the block 9 in response to one or more fibrillation conditions detected by the devices 51, 52 and 53 in the detection block 5. If the fibrillation persists, despite this treatment (which can be repeated if necessary) from the nerve-heart defibrillator block 9, the control unit 13 can order collaboration with other parts of the defibrillator implant 1 which are relevant to the persistent fibrillation condition, so one or more electrical defibrillation shocks are emitted by the block 11 for electrical defibrillation.

[0030] It should be noted that the nerve-heart stimulator 9 according to a preferred embodiment of the invention in the defibrillator implant 1 is also capable of treating, as previously noted, impending but as yet unestablished fibrillation conditions (or other refractory tachyarrhythmia) by prophylactically applying an activating current to the vagus nerve 27 and a blocking current to the sympathetic nerve 26, as described above.

[0031] Here, the nerve signal monitoring device 53 contributes to improved monitoring of the detection block 5 as regards tachyarrhythmias. The device 53 is e.g. arranged to be able to observe changes in the signal patterns of the autonomic nervous system generated by e.g. myocardial ischemia, a condition which often precedes a tachyarrhythmia. When the signal patterns are registered with an electrode described here (FIG. 4) and these patterns are processed (e.g. compared to patterns in normal conditions), changes can be detected in good time before dangerous tachyarrhythmia becomes established.

[0032] One example of the course in treatment with the nerve-heart defibrillator 9, utilizing the neurosensor 53 and collaborating with other units in the defibrillator implant 1, is provided below.

[0033] As soon as the detector block 5 detects an impending fibrillation or some other dangerous, impending tachyarrhythmia (e.g. a change in the activity of the autonomic nervous system), treatment from the block 9

can be started in the form of light activation of the vagus nerve 27 for 5 seconds. If the block 5 detects a return to a normal state for the heart 25, treatment is terminated. But if the detector 5 continues to detect an abnormal condition for the heart 25, treatment will continue, supplemented with blocking of the sympathetic nerve, preferably at the ganglion stellatum, for a few seconds. If heart activity drops below a given rate because of the current delivered to the vagus nerve and the sympathetic nerve, the pacemaker block 7 automatically begins stimulating the heart 25 in order to maintain or restore its sinus rhythm. Treatment is terminated if the detector 5 now shows that the heart 25 has returned to a normal state. If this is not the case, the electrical defibrillator block 11 can be activated in order to shock the heart 25 in the conventional way.

[0034] Even if the nerve-heart stimulator 9 has been described for an application which also comprises many other units in a conventional implant, the described application obviously only shows the nerve-heart defibrillator's 9 possibilities and shall not be interpreted as any restriction on its use. The nerve-heart stimulator 9 can also, in treatment of supraventricular arrhythmias, only comprise the parts which stimulate the vagus nerve. In the treatment of supraventricular arrhythmias, the nerve-heart stimulator does not necessarily have to be implanted in the patient's body. It can also be used extracorporeally, e.g. for temporary use with appropriately situated external and internal nerve electrodes.

Claims

1. A device (53) for detecting an arrhythmia, relative to a normal state for a heart (25), in response to activity in a nerve signal conveying information from the autonomic nerve system to the heart (25), whereby the device (53) contains a sensor body (24) for sensing neural activity, a comparator with a threshold value forming a condition for the presence of arrhythmia, the comparator emitting an arrhythmia-indicating output signal depending on whether neural activity meets the condition, characterized in that the sensor body (24) is devised to be placeable in an extracardiac position for at least one of the sympathetic (26) and vagus (27) nerves and, in direct contact there with the nerve or via a blood vessel, directly sense activity in the nerve.
2. A device according to claim 1, characterized in that the sensor body (24) consists of an electrode (24) with two sub-electrodes (241, 242) arranged at a distance from each other along the nerve's (27) longitudinal direction.
3. A device according to claim 2, characterized in that an additional sensor body is arranged for detection, whereby the additional sensor body is devised to be placeable around a blood vessel for sensing the

pressure of blood in the vessel.

4. A device according to claim 3, characterized in that the additional sensor body has a holder part in the form of an at least partially ring-shaped clamp and a sensor part in the form of a blood pressure-sensitive airbag on the inside of the holder part.
5. A device for heart therapy which is devised to supply therapy to the heart (25), on the basis of one or more control signals for the device, characterized in that at least one of said control signals is based on the arrhythmia-indicating output signal emitted by the device (53) according to claim 1.

Patentansprüche

1. Eine Vorrichtung (53) zum Detektieren einer Arrhythmie, relativ zu einem normalen Zustand eines Herzens (25), als Reaktion auf die Aktivität in einem Nervensignal, das Information von den autonomen Nervensystem zum Herzen (25) überführt, wobei die Vorrichtung (53) einen Sensorkörper (24) zum Abfühlen neuraler Aktivität und einen Komparator mit einem Schwellwert, der eine Bedingung für das Vorliegen einer Arrhythmie bildet, aufweist, wobei der Komparator abhängig davon, ob die neurale Aktivität die Bedingung erfüllt, ein arrhythmieanzeigendes Ausgangssignal abgibt, **dadurch gekennzeichnet**, daß der Sensorkörper (24) ausgebildet ist, um in einer Position außerhalb des Herzens für mindestens einen der Sympathikus- (26) und Vagusnerven (27) platzierbar zu sein und dort in direktem Kontakt mit dem Nerven oder über ein Blutgefäß direkt die Aktivität in dem Nerven abzufühlen.
2. Eine Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß der Sensorkörper (24) aus einer Elektrode (24) mit zwei Unterelektroden (241, 242) besteht, die in einem Abstand voneinander entlang der Längsrichtung des Nerven (27) angeordnet sind.
3. Eine Vorrichtung nach Anspruch 2, **dadurch gekennzeichnet**, daß ein zusätzlicher Sensorkörper zur Detektion vorgesehen ist, wobei der zusätzliche Sensorkörper ausgebildet ist, um um ein Blutgefäß herum zum Abfühlen des Blutdruckes in dem Gefäß platzierbar zu sein.
4. Eine Vorrichtung nach Anspruch 3, **dadurch gekennzeichnet**, daß der zusätzliche Sensorkörper ein Halteteil in der Form einer zumindest teilweise ringförmigen Klammer und ein Sensorteil in der Form eines blutdruckempfindlichen Luftkissens auf der Innenseite des Halteteils hat.

5. Eine Vorrichtung für die Herztherapie, die ausgebildet ist, um dem Herzen (25) auf der Basis eines oder mehrerer Steuersignale für die Vorrichtung Therapie zu liefern, **dadurch gekennzeichnet**, daß zumindest ein Steuersignal auf dem von der Vorrichtung (53) gemäß Anspruch 1 abgegebenen arrhythmieanzeigenden Ausgangssignal basiert.

Revendications

1. Dispositif (53) destiné à détecter une arythmie, par rapport à un état normal d'un coeur (25), en réponse à de l'activité dans un signal nerveux convoyant de l'information à partir du système nerveux autonome vers le coeur (25), le dispositif (53) contenant un corps (24) formant capteur, destiné à détecter une activité neuronale, un comparateur ayant une valeur de seuil formant une condition pour la présence d'arythmie, le comparateur émettant un signal de sortie indicateur d'une arythmie en fonction du fait que l'activité neuronale répond ou non à la condition, caractérisé en ce que le corps (24) formant capteur est conçu pour pouvoir être placé dans une position extra-cardiaque pour au moins l'un des nerfs sympathique (26) et vagus (27), en contact direct à cet endroit avec le nerf ou par l'intermédiaire d'un vaisseau sanguin, et il détecte directement l'activité dans le nerf.
2. Dispositif suivant la revendication 1, caractérisé en ce que le corps (24) formant capteur est constitué d'une électrode (24) ayant deux sous-électrodes (241, 242) agencées à une distance mutuelle l'une de l'autre le long de la direction longitudinale du nerf (27).
3. Dispositif suivant la revendication 2, caractérisé en ce qu'un corps formant capteur supplémentaire est disposé pour la détection, grâce à quoi le corps formant capteur supplémentaire est conçu pour pouvoir être placé autour d'un vaisseau sanguin pour détecter la pression sanguine dans le vaisseau.
4. Dispositif suivant la revendication 3, caractérisé en ce que le corps formant capteur supplémentaire comporte une partie formant support sous la forme d'un dispositif de serrage au moins partiellement en forme d'anneau et une partie formant capteur sous la forme d'un sac d'air sensible à la pression sanguine sur l'intérieur de la partie formant support.
5. Dispositif pour une thérapie cardiaque qui est conçue pour donner une thérapie au coeur (25), sur la base d'un ou plusieurs signaux de commande pour le dispositif, caractérisé en ce qu'au moins l'un des signaux de commande est fondé sur le signal de sortie indiquant une arythmie émis par le dispositif

(53) conforme à la revendication 1.

5

10

15

20

25

30

35

40

45

50

55

7

FIG 1

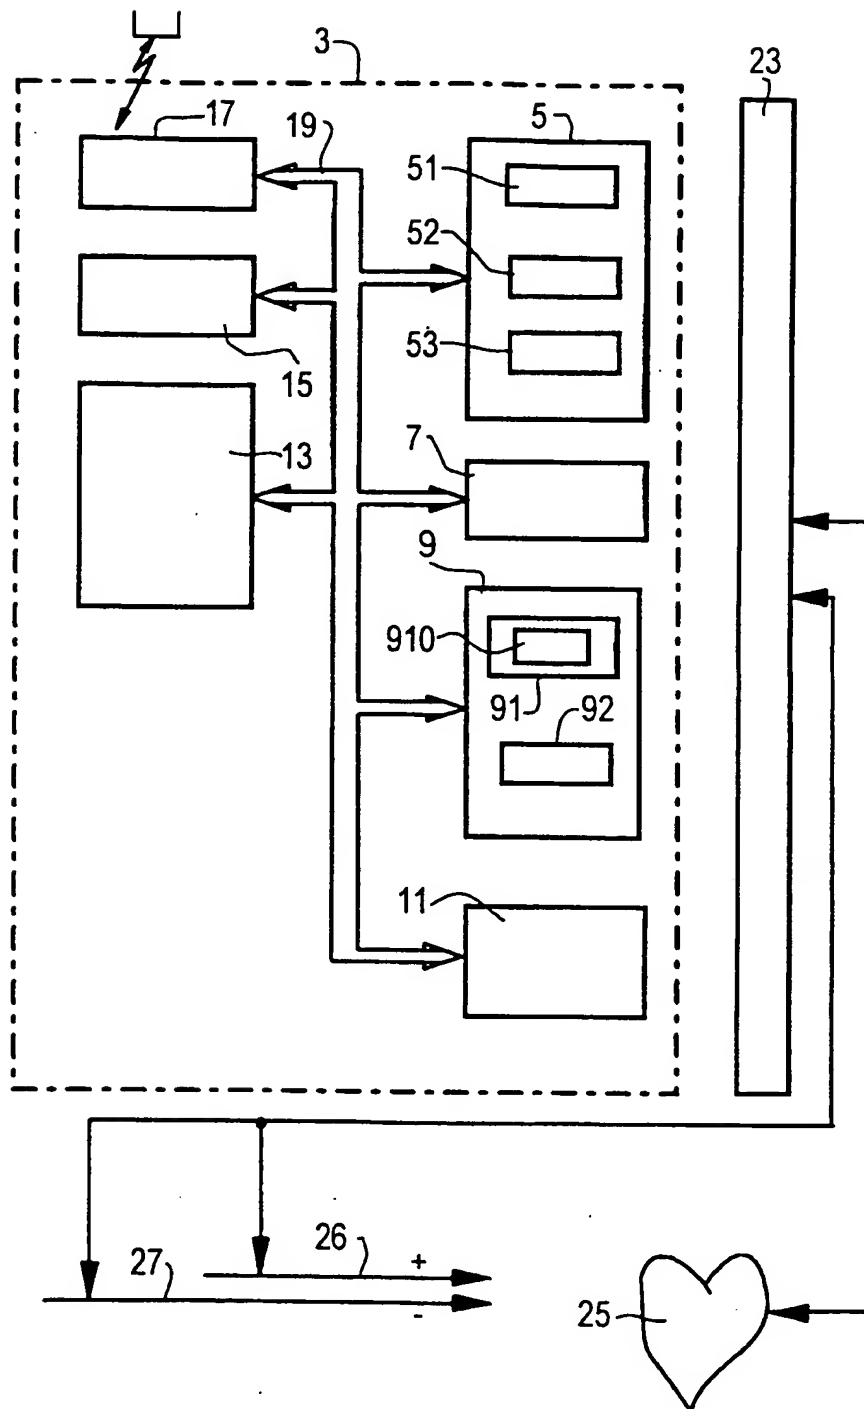


FIG 2

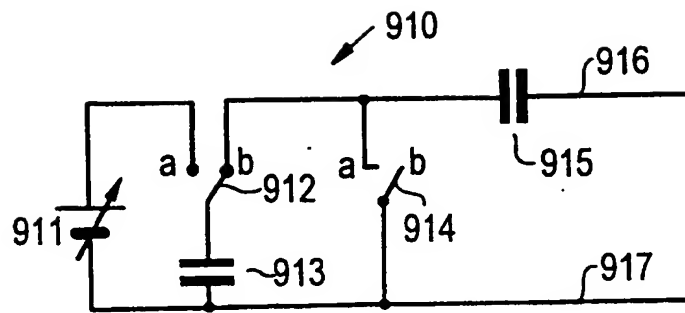


FIG 3

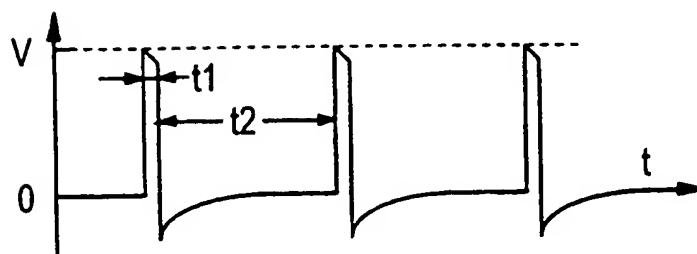


FIG 4

